




Video Surveillance Solutions

Agricultural Applications

- Police Cruisers
- EMT & Fire Trucks
- Construction Equipment
- Agricultural Equipment
- Forestry & Logging
- Armored & Military
- Commercial & Residential
- Marine Submersible
- IP Web Interface
- Wireless Monitoring

QUADVIEW m

VSS 9" Surveillance System



Part: VSS QVK2



(1) Qview 9" TFT LCD Quad Color Monitor



(2) Qcam 1/3" CCD Weatherproof Color Camera

- Size 9" LCD
- Digital Panel YES
- Pixel 1440x234
- Brightness 350cd/m2
- Resolution 500dB
- S/N 90dB
- Isolation 65dB
- Video Input 4
- Audio Input 1
- Power Supply 12-32 VDC
- Power Consumption 8W
- DisplayFormat 16:9
- Push Button YES
- Auto Power On YES
- System PAL/NTSC
- Contrast 500:1
- Operate Temperature -10°C, 14°F~55°C, 131°F
- Storage Temperature -30°C, -22°F~75°C, 167°F
- Rearview YES
- Built-in Speaker YES
- Built-in Quad YES

- Image Sensor SHARP CCD
- TV System NTSC/PAL optional
- Effective Pixels N: 510x492 pixels P: 500x582 pixels
- Horizontal Resolution 420 CPL
- Lens Angle 83°
- Minimum Illumination 0Lux (LED ON)
- IR Led 18pcs
- Night Vision Distance 45ft - Optimal Distance 25ft
- Operating Temperature -20°C, -4°F~70°C, 158°F CRH95% Max
- Lens 4mm
- Power Supply DC12V Through Monitor
- Size 70 (L) x50 (w) x40 (H) mm
- N.W 400g
- Waterproof Rate IP67
- Shell Material Aluminum Alloy

Monitor
 Full screen is available for V1, V2, V3 and V4.
 Split screen is available for both V1&V2, V3&V4
 Any input can be set in "rearview" mode.



(2) QPVC 65ft Cord



(1) QDCPP DC Power Cord



(2) QPVC 15ft Cord




(1) Qmount



(1) QAV AV Cord



(1) Qmote

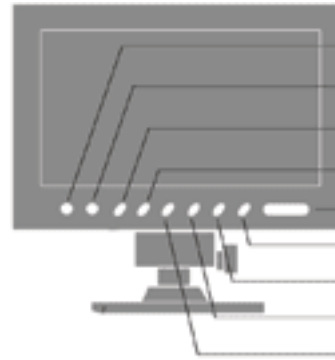

Accessories & Upgrades



QCBC2 Trailer Hitch Kit



VSS Qcam Side Cameras



Vcam
 Super Heavy Duty Camera
 VSS Manufactured

Agriculture Applications Sales
 TOLL FREE: 888-917-3893

www.VSS911.com
 sales@VSS911.com